



Direct operated G 1/4"



Valve	Port size (G)	Orifice size (mm)	Flow factor (l/min)	Set disc	Coil	Power (W)		Pressure drop Δ p (bar)			Max. media- temp. (C°)	Max. ambiente temperature (C°)	Ex-class
						DC	AC	Min	Max				
									DC	AC			
133 X 01	1/4	6	680	NBR	496895	8	8	0	10	10	75	65	IP 65
					492300	6	6	0	10	10	75	75	EX me II T4/T5
					496555	6	6	0	10	10	75	65	EX d mb II T4/T5/T6
					496565	0,3	-	0	10	-	75	80	EX ia IIC T4/T5/T6

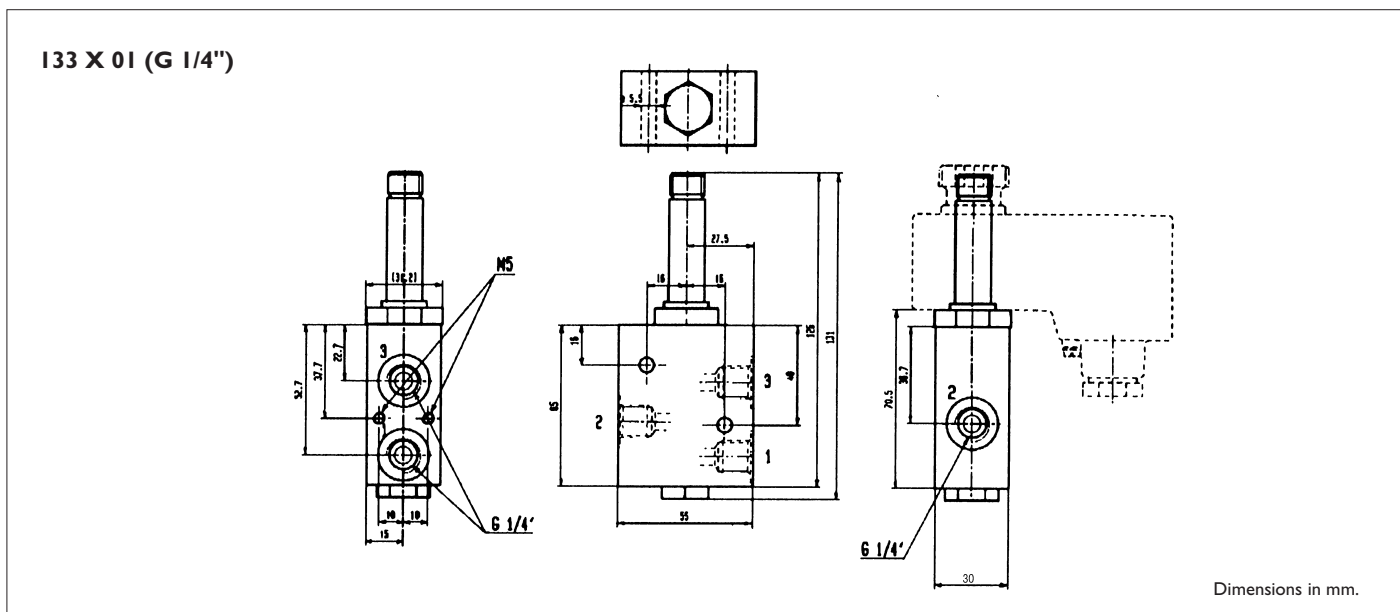

Dimensions in mm.

AXEL LARSSON 

Head Office: Truckvägen 12, P.O. Box 805, SE-194 28 Upplands Väsby (Stockholm), Sweden.